



REGENCY®

CEILING FANS

A DIVISION OF HINKLEY LIGHTING



Create a space to thrive, infused with airiness and style.

Introducing the 2019 Regency Fan Collection — now a division of Hinkley Lighting.

Mindful Motion

Quality, Energy-Saving Motors

The motor is responsible for supplying the power to drive the fan's blades for maximum performance. Most quality motors have electrical ratings of 1.5 amps or less because top-notch materials like high-grade copper wire, precision bearings and dynamically balanced aluminum rotors give the fan all the power it needs. Regency motors are carefully selected to be the most efficient for the fan's blade size and the room's environment, and all have electrical ratings of 1.5 amps or less.

Quality Blades

Regency fan blades are finished with the best real wood veneer to keep out moisture and resist warping. They are computer balanced to within one gram of each other. Regency's blade arms are made of high-grade, die-cast zinc or steel. They are measured to the exact same pitch and balance and have large mounting screws with lock washers to ensure exact alignment.

Maximum Performance

Peak performance on any fan is attained by the perfect combination of blade size, motor size, and blade pitch. Regency's wide range of blades and motors offers endless combinations, so the recommended options for maximum performance are listed for each fan on both the fan's catalog page and the specifications guide in the back of the catalog (pages 80-84).

Important Features for Quiet Operation

- DC motor fans virtually eliminate noise for a silent experience.
- Bearings: Regency only uses double-sealed, lubricated-for-life, high-grade steel bearings. The lubricant stays in and the dust and dirt stay out for quiet, lifelong operation.
- Speed Control: Capacitors control the speed of AC motor fans, and Regency uses a separate one for each speed – three in every three-speed fan. Single capacitor fans can be three-speed, but often hum.
- Vibration Isolators: Generous use of gaskets and washers throughout a fan will dampen motor vibrations. Regency uses the highest quality rubber hang-bracket isolators, motor gaskets and blade-screw washers for quiet operation.

Simple Installation

Proper installation is essential to guarantee a quiet, smooth-running ceiling fan. All Regency fans are designed to make installation very simple and ensure that every component fits tightly together, stays in alignment and operates silently and wobble-free.

Table of Contents

DESIGNER SERIES FANS

Andros	22
Artiste 60"	17
Artiste 72"	16
Bimini	20
Cabana	29
Cayman	23
Ciara	28
Countess	44
Deuce	33
Envoy	40
Grand Marquis	36
Indy 56"	13
Indy 72"	11
Industrial	48
Lafayette	38
Marquis	42
Module	18
Nola	35
Oasis	24
Patio Pro	31
Professional	46
Spire	21
Strasburg	32
Tier	15
Vail	8
Vantage	6
Vera Cruz	26
Verge	19

MOTOR ASSEMBLY FANS

Excel	62
Gladiator	56
Grander	52
Hover	55
LX2	61
Tropic Air	59

BLADES

52" Designer Blades	64
54" Carved Wood Blades	65
Additional Blades	68
Gladiator Blades	58
Grander Blades	54
Outdoor Blades	66

LIGHT KITS

Damp Location	74
Energy Saving	74
Fitters	75
Glass Shades	75
LED Kits	70
Light Kits	74
Wet Location	80

FAN ACCESSORIES

Bulbs	76
Ceiling Accessories	76
Downrods	69
Pull Chains	76
Remote Controls	79
Switches	76
Wall Controls	78

SPECIFICATIONS

Ceiling Fan	80-84
Room Size, Ceiling Height, Slope	85
Light Kit	86-87
Fitter	87

Designer Series Fans



Andros 52"
AD- page 22



Artiste 60"
AT- page 17



Artiste 72"
AT2- page 16



Bimini 60"
BIM- page 20



Cabana 36"
RC- page 29



Cayman 52"
CM- page 23



Ciara 52"
CI- page 28



Countess 42"
CT- page 44



Deuce 54"
DU- page 33



Envoy 52"
EN2- page 40



Grand Marquis 52"
GMRP- page 36



Indy 56"
IN- page 13



Designer Series Fans



Indy 72"
IN2- page 11



Industrial 56"
IND- page 48



Lafayette 52"
LF- page 38



Marquis 52"
MR2- page 42



Module 58"
MU- page 18



Nola 52"
NL- page 35



Oasis 52"
OA2- page 24



Patio Pro 52"
VP2- page 31



Professional 52"
PFES52- page 46



Spire 52"
SR- page 21



Strasburg 60"
ST- page 32



Tier 54"
TI- page 15



Designer Series Fans



Vail 52"
page 8



Vantage 66"
page 6



Vera Cruz 52"
page 26



Verge 52"
page 19



Motor Assembly Fans



Excel
MX2- page 62



Gladiator
GL3- page 56



Grander
GN- page 52



Hover
HV- page 55



LX2
LX2- page 61



Tropic Air
TA2- page 59







Designer Series Fans

Harmony, balance and an aura of calm is at the heart of Regency Ceiling Fans. Choose from an array of striking designs, sizes, styles, finishes and lighting effects... all exquisitely crafted to complement your favorite gathering space. Meticulous standards of quality, efficiency, durability and safety ensure a complete sense of luxury and relaxation.

66" Vantage™

VT-LN

Liquid Nickel Finish
Silver Blades
Frosted Glass



VT-DF

Driftwood Finish
Driftwood Blades
Frosted Glass



VT-MW

Matte White Finish
Matte White Blades
Frosted Glass



Create an aesthetic statement with the Vantage ceiling fan's modern industrial design featuring eight, gently curved blades. This enormous fan's whisper quiet DC motor will cool the largest of spaces and the fan's warm white LED light comes with a cover which may be used when the light is not needed.

VT-ORB

Oil Rubbed Bronze Finish
Oil Rubbed Bronze Blades
Frosted Glass



VT-MB

Matte Black Finish
Matte Black Blades
Frosted Glass



VT-BNW

Brushed Nickel
Wet Finish
Silver Blades
Frosted Glass



FEATURES:

- Eight, 66" blades **(included)**
- **DC-165mm motor**
- 6-speed, reversing
- 12.5° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- LED 16W
- 3000K warm white color temperature
- Light output is 1200 lumens-delivered
- L70 - 36,000 hours
- Light kit cover included
- Box weight 27 lb
- Remote Control **(included)**
- UL listed : Wet



OPTIONS NOT INCLUDED:

- Select Touch Wall Control (DCWC3)
(Control indoor mount only)



Note: Multiple Vantage fans cannot operate on the same circuit. Each Vantage fan must have its own power switch.



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	8572	6552
Energy Use (Watts)	31	19
Energy Costs (Yearly)	\$9	\$6
Airflow Efficiency (CFM/W)	281	345

52" Vail™

VA-MW

Matte White Finish
Matte White Blades
Frosted Glass



VA-ORB

Oil Rubbed Bronze Finish
Oil Rubbed Bronze Blades
Frosted Glass



VA-BNW

Brushed Nickel Wet Finish
Silver Blades
Frosted Glass



VA-DF

Driftwood Finish
Driftwood blades
Frosted Glass



VA-MB

Matte Black Finish
Matte Black Blades
Frosted Glass



VA-LN

Liquid Nickel Finish
Silver Blades
Frosted Glass



FEATURES:

- 52" blades **(included)**
- **DC-125mm motor**
- 6-speed, reversing
- 14° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- LED 16W
- 3000K warm white color temperature
- Light output is 1200 lumens-delivered
- L70 - 36,000 hours
- Light kit cover included
- Box weight 19.2 lb
- Remote Control **(included)**
- UL Listed : Wet



OPTIONS NOT INCLUDED:

- Select Touch Wall Control (DCWC3)
(Control indoor mount only)



Note: Multiple Vail fans cannot operate on the same circuit. Each Vail fan must have its own power switch.



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	7111	4778
Energy Use (Watts)	33	22
Energy Costs (Yearly)	\$9	\$6
Airflow Efficiency (CFM/W)	215	217

72" Indy™



72" Indy™



IN2-EB
English Bronze Finish
English Bronze ABS Blades



IN2-MW
Matte White Finish
Matte White ABS Blades



IN2-BN
Brushed Nickel Finish
Silver ABS Blades

FEATURES:

- Three, 72" ABS blades **(included)**
- 188 x 25mm motor
- 4-speed, reversing
- 55° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 18°, 4/12 pitch
- Box weight 24.7 lb
- Wall Control (FFCS-2) **(included)**
- UL Listed : Damp



ENERGY GUIDE	
STANDARD	HIGH SPEED
Airflow (CFM)	5988
Energy Use (Watts)	60
Airflow Efficiency (CFM/W)	99

56" Indy™

IN-BN

Brush Nickel Finish
Silver Metal Blades



56" Indy™

IN-EB

English Bronze Finish
English Bronze Metal Blades



IN-MW

Matte White Finish
Matte White Metal Blades



IN-MB

Matte Black Finish
Matte Black Metal Blades



FEATURES:

- Three, 56" metal blades **(included)**
- 172 x 17mm motor
- 4-speed, no reversing function
- 35° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- Box weight 17.2 lb
- Wall Control (FFCS-2) **(included)**
- UL Listed : Damp



ENERGY GUIDE	
STANDARD	HIGH SPEED
Airflow (CFM)	5441
Energy Use (Watts)	61
Airflow Efficiency (CFM/W)	89

54" Tier™



54" Tier™

TI-ORB

Oil Rubbed Bronze Finish
Oil Rubbed Bronze Blades
Matte Glass



TI-BNW

Brushed Nickel Wet Finish
Silver Blades
Matte Glass



FEATURES:

- 54" blades **(included)**
- 188 x 20mm motor
- 3-speed, manual reversing from switch
- 14° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 25°, 5/12 pitch
- LED 16W
- 3000K warm white color temperature
- Light output is 1200 lumens-delivered
- L70 - 36,000 hours
- Light kit cover included
- Box weight 24.7 lb
- Remote Control **(included)**
- UL Listed : Wet



OPTIONS NOT INCLUDED:

- Select Touch Wall Transmitter (2WWC)
(Control indoor mount only)



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	5718	3640
Energy Use (Watts)	63	38
Energy Costs (Yearly)	\$21	\$12
Airflow Efficiency (CFM/W)	92	96

72" Artiste™

AT2-BNW

Brushed Nickel Wet Finish
Silver Blades
Frosted Glass

AT2-ORB

Oil Rubbed Bronze Finish
Dark Walnut Blades
Frosted Glass

AT2-MW

Matte White Finish
Matte White Blades
Frosted Glass

FEATURES:

- Three, 72" blades **(included)**
- **DC-188mm motor**
- 6-speed, reversing
- 14° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- LED 17W
- 3000K warm white color temperature
- Light output is 1350 lumens-delivered
- L70 - 40,000 hours
- Box weight 24.5 lb
- Remote Control **(included)**
- UL Listed : Wet



OPTIONS NOT INCLUDED:

- Select Touch Wall Control (DCWC3)
(Control indoor mount only)

Note: Multiple Artiste 2 fans cannot operate on the same circuit. Each Artiste 2 fan must have its own power switch.

- Light kit cover



ENERGY GUIDE

ENERGY GUIDE	
STANDARD	HIGH SPEED
Airflow (CFM)	10426
Energy Use (Watts)	29
Airflow Efficiency (CFM/W)	358

60" Artiste™

AT-ORB

Oil Rubbed Bronze Finish
Dark Walnut Blades
Frosted Glass

AT-BN

Brushed Nickel Finish
Silver Blades
Frosted Glass

FEATURES:

- Three, 60" blades **(included)**
- **DC-188mm motor**
- 6-speed, reversing
- 14° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- LED 17W
- 3000K warm white color temperature
- Light output is 1350 lumens-delivered
- L70 - 40,000 hours
- Box weight 19.0 lb
- Remote Control **(included)**
- UL Listed : Damp



OPTIONS NOT INCLUDED:

- Select Touch Wall Control (DCWC3)
(Control indoor mount only)

Note:

Multiple Artiste fans cannot operate on the same circuit. Each Artiste fan must have its own power switch.

- Light kit cover



ENERGY GUIDE

ENERGY GUIDE	
STANDARD	HIGH SPEED
Airflow (CFM)	8293
Energy Use (Watts)	33
Airflow Efficiency (CFM/W)	252

58" Module™



MU-BNW

Brushed Nickel Wet Finish
Silver Blades
Frosted Glass

FEATURES:

- Four, 58" beveled blades **(included)**
- **DC-125mm motor**
- 6-speed, reversing
- 13.5° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 17.5°, 4/12 pitch
- LED 17W
- 3000K warm white color temperature
- Light output is 1200 lumens-delivered
- L70 - 36,000 hours
- Box weight 18.1 lb
- Remote Control **(included)**
- UL Listed : Wet



OPTIONS NOT INCLUDED:

- Select Touch Wall Control (DCWC3)
(Control indoor mount only)

Note: Multiple Module fans cannot operate on the same circuit. Each Module fan must have its own power switch.

- Light kit cover



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	5235	3673
Energy Use (Watts)	33	22
Energy Costs (Yearly)	\$9	\$6
Airflow Efficiency (CFM/W)	161	167

52" Verge™



VR-BNW

Brushed Nickel Wet Finish
Silver Blades
Frosted Glass

FEATURES:

- Three, 52" blades **(included)**
- 153 x 17mm motor
- 3-speed, manual reversing from switch
- 14° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- LED 17W
- 3000K warm white color temperature
- Light output is 1200 lumens-delivered
- L70 - 36,000 hours
- Box weight 19.4 lb
- Remote Control **(included)**
- UL Listed : Wet



OPTIONS NOT INCLUDED:

- Select Touch Wall Transmitter (2WWC)
(Control indoor mount only)



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	4930	2619
Energy Use (Watts)	52	31
Energy Costs (Yearly)	\$16	\$10
Airflow Efficiency (CFM/W)	95	84

60" Bimini™

BI-BNW

Brushed Nickel Wet Finish
Silver Blades

BIM-AW

Appliance White Finish
Appliance White Blades

BIM-ORB

Oil Rubbed Bronze Finish
Oil Rubbed Bronze Blades

FEATURES:

- Three, 60" blades **(included)**
- Light kit adaptable. See pages 70-74.
- 188 x 22mm motor
- 3-speed, manual reversing from fan switch
- 14° blade pitch
- 4" downrod included
- Downrod mounting only
- Mounts to sloped ceilings up to 23°, 5/12 pitch
- Box weight 27.8 lb
- Remote Control **(included)**
- UL Listed : Wet

OPTIONS NOT INCLUDED:

- Select Touch Wall Transmitter (2WWC)
(Control indoor mount only)



ENERGY GUIDE		
STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	6857	4120
Energy Use (Watts)	72	45
Energy Costs (Yearly)	\$27	\$15
Airflow Efficiency (CFM/W)	95	92

52" Spire™

SR-ORB

Oil Rubbed Bronze Finish
Rubbed Bronze Blades
Frosted Glass

SR-MW

Matte White Finish
Matte White Blades
Frosted Glass

FEATURES:

- 52" blades **(included)**
- 153 x 20mm motor
- 3-speed, manual reversing from fan switch
- 12° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- LED 17W
- 3000K warm white color temperature
- Light output is 1200 lumens-delivered
- L70 - 36,000 hours
- Light kit cover included
- Box weight 22 lb
- Remote Control **(included)**
- UL Listed : Wet



OPTIONS NOT INCLUDED:

- Select Touch Wall Transmitter (2WWC)
(Control indoor mount only)



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	4822	2562
Energy Use (Watts)	52	31
Energy Costs (Yearly)	\$16	\$10
Airflow Efficiency (CFM/W)	93	83

52" Andros™



AD-ORB

Oil Rubbed Bronze Finish
 Rubbed Bronze Blades
 Clear Glass

FEATURES:

- 52" blades **(included)**
- 172 x 20mm motor
- 3-speed, manual reversing from fan switch
- 14° blade pitch
- 4" downrod included
- Downrod mounting only
- Mounts to sloped ceilings up to 28°, 6/12 pitch
- 3 x 40W candelabra (E12) lower light included



- Box weight 32 lb
- Remote Control **(included)**
- UL Listed : Wet

OPTIONS NOT INCLUDED:



- Select Touch Wall Transmitter (2WWC)
 (Control indoor mount only)



ENERGY GUIDE		
STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	5387	3762
Energy Use (Watts)	91	40
Energy Costs (Yearly)	\$19	\$12
Airflow Efficiency (CFM/W)	91	94

52" Cayman™



CM-ORB

Oil Rubbed Bronze Finish
Oil Rubbed Bronze ABS Blades

FEATURES:

- 52" blades **(included)**
- Additional blade options available. See pages 64-68.
- Light kit adaptable. See pages 70-74.
- 188 x 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Mounts to sloped ceilings up to 30°, 7/12 pitch
- Downrod mounting only
- Box weight 36.4 lb
- UL Listed : Wet

OPTIONS NOT INCLUDED:

- Universal Remote Controls (URC-WL)/ (URC-WLES)
- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)

Mounting Recommendation

To reduce the risk of fire, electric shock or personal injury, mount this fan to an outlet box marked "ACCEPTABLE FOR FAN SUPPORT OF 70 LBS." and USE MOUNTING SCREWS PROVIDED WITH THE OUTLET BOX.



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	5530	3605
Energy Use (Watts)	75	45
Energy Costs (Yearly)	\$21	\$15
Airflow Efficiency (CFM/W)	74	80

52" Oasis™

OA2-DF

Driftwood Finish

Driftwood ABS Blades

LK12W-DF Driftwood LED light kit
(Light kit sold separately)



OA2-AW

Appliance White Finish

Appliance White ABS Blades



OA2-AW

Appliance White Finish

PP52AW Appliance White
palm ABS Blades
(Palm blades sold separately)



FEATURES:

- 52" blades **(included)**
- **ABS fan housing**
- Additional blade options available.
See pages 64-68.
- Light kit adaptable. See pages 70-74.
- 188 x 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Mounts to sloped ceilings up to 26°, 6/12 pitch
- Downrod mounting only
- Box weight 22.3 lb
- UL Listed : Wet

OPTIONS NOT INCLUDED:



- Universal Remote Controls (URC-WL)/
(URC-WLES)
- Select Touch Wall Transmitter (2WWC)
(Control indoor mount only)



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	5434	3773
Energy Use (Watts)	59	36
Energy Costs (Yearly)	\$17	\$10
Airflow Efficiency (CFM/W)	92	105



OA2-AW

Appliance White Finish

PL52AW Appliance White leaf ABS Blades
(Leaf blades sold separately)



OA2-MB

Matte Black Finish

PL52MHS - Mahogany leaf ABS Blades
(Leaf blades sold separately)



OA2-MB

Matte Black Finish

Matte Black Blades



OA2-ORB

Oil Rubbed Bronze Finish

PP52WAL Walnut palm ABS Blades
(Palm blades sold separately)



OA2-ORB

Oil Rubbed Bronze Finish

Oil Rubbed Bronze Blades

LK95W-ORB Oil Rubbed Bronze light kit
(Light kit sold separately)



OA2-ORB

Oil Rubbed Bronze Finish

52CMORB Oil Rubbed Bronze ABS Blades
(Leaf blades sold separately)



OA2-ORB

Oil Rubbed Bronze Finish

Oil Rubbed Bronze Blades

LK90W-ORB Oil Rubbed Bronze light kit
(Light kit sold separately)



LED

OA2-ORB

Oil Rubbed Bronze Finish

Oil Rubbed Bronze Blades

LK12W-ORB Oil Rubbed Bronze LED light kit
(Light kit sold separately)

52" Vera Cruz™

VC2-ORB

Oil Rubbed Bronze Finish
Oil Rubbed Bronze ABS Blades



VC2-ORB

Oil Rubbed Bronze Finish
PL52MHS Mahogany Leaf ABS Blades
(Leaf blades sold separately)



FEATURES:

- 52" blades **(included)**
- Additional blade options available. See pages 64-68.
- Light kit adaptable. See pages 70-74.
- Flush mount capability
- 188 x 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Mounts to sloped ceilings up to 35°, 8/12 pitch
- Box weight 18.7 lb
- UL Listed : Wet

OPTIONS NOT INCLUDED:



- Universal Remote Controls (URC-WL)/ (URC-WLES)
- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	5146	3617
Energy Use (Watts)	60	37
Energy Costs (Yearly)	\$17	\$10
Airflow Efficiency (CFM/W)	86	98

VC2-MB

Matte Black Finish

PL52MHS Mahogany Leaf ABS Blades
(Leaf blades sold separately)



VC2-MB

Matte Black Finish

Matte Black ABS Blades

LK12W-MB light kit
(Light kit sold separately)



VC2-MB

Matte Black Finish

Matte Black ABS Blades



52" Ciara™

CI-MB

Matte Black Finish
Matte Black Blades



CI-ORB

Oil Rubbed Bronze Finish
Oil Rubbed Bronze Blades



FEATURES:

- 52" blades **(included)**
- Light kit adaptable. See pages 70-74.
- 172 x 14mm motor
- 3-speed forward, manual reversing from switch
- 13° blade pitch
- 4" downrod
- Pull chain control
- Mounts to sloped ceilings up to 20°, 4/12 pitch
- Box weight 20 lb
- UL Listed : Wet

OPTIONS NOT INCLUDED:

- Universal Remote Controls (URC-WL)/ (URC-WLES)
- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)



WET

ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	5270	3114
Energy Use (Watts)	61	35
Energy Costs (Yearly)	\$17	\$11
Airflow Efficiency (CFM/W)	87	89

36" Cabana™

RC-ORB

Oil Rubbed Bronze Finish
Oil Rubbed Bronze ABS Blades



RC-AW

Appliance White Finish
Appliance White ABS Blades



FEATURES:

- 36" blades **(included)**
- Light kit adaptable. See pages 70-74.
- Flush mount capability
- 153 x 10mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Pull chain control
- Mounts to sloped ceilings up to 35°, 8/12 pitch
- Box weight 12.8 lb
- UL Listed : Wet

OPTIONS NOT INCLUDED:



- Universal Remote Controls (URC-WL)/ (URC-WLES)
- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)

WET

ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	3112	2409
Energy Use (Watts)	45	29
Energy Costs (Yearly)	\$13	\$8
Airflow Efficiency (CFM/W)	69	83

52" Patio Pro™



52" Patio Pro™

VP2-AW

Appliance White Finish
Appliance White ABS Blades



VP2-AW

Appliance White Finish
PL52AW Appliance White leaf ABS Blades
(Leaf blades sold separately)



FEATURES:

- 52" blades **(included)**
- Additional blade options available. See pages 64-68.
- Light kit adaptable. See pages 70-74.
- Flush mount capability
- 188 x 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Mounts to sloped ceilings up to 35°, 8/12 pitch
- Box weight 15.4 lb
- UL Listed : Wet

OPTIONS NOT INCLUDED:

- Universal Remote Controls (URC-WL)/ (URC-WLES)
- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)



WET

ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	5871	3718
Energy Use (Watts)	57	36
Energy Costs (Yearly)	\$17	\$10
Airflow Efficiency (CFM/W)	103	103

60" Strasburg™ with Uplight



ST-ORB

Oil Rubbed Bronze Finish
Oil Rubbed Bronze/Cherry Blades
(shown with Oil Rubbed Bronze Blades)

FEATURES:

- 60" reversible blades **(included)**
- Light kit adaptable. See pages 70-74.
- Uplight
- 188 x 25mm motor
- 3-speed forward, reversing
- 14° blade pitch
- 6" and 12" downrods included
- Mounts to sloped ceilings up to 25°, 5/12 pitch
- 6 x 15W candelabra (E12) upper light included



- Box weight 38.6 lb
- Select Touch Wall Transmitter (2WWCD) **(included)**



OPTIONS NOT INCLUDED:

- Remote Control Transmitter (RCTD)

Mounting Recommendation

To reduce the risk of fire, electric shock or personal injury, mount this fan to an outlet box marked "ACCEPTABLE FOR FAN SUPPORT OF 70 LBS." and USE MOUNTING SCREWS PROVIDED WITH THE OUTLET BOX.

ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	6105	3998
Energy Use (Watts)	80	52
Energy Costs (Yearly)	\$24	\$14
Airflow Efficiency (CFM/W)	76	77

54" Deuce™

DU-BN

Brushed Nickel Finish
Silver Blades



FEATURES:

- Two, 54" blades **(included)**
- 153 x 22mm motor
- 3-speed forward, manual reversing from switch
- 15° blade pitch
- 4" downrod included
- Light kit cover included
- Mounts to sloped ceilings up to 29°, 6/12 pitch
- 1 x 75W halogen bulb (E11) (included)
- Box weight 21.6 lb
- Remote Control **(included)**



OPTIONS NOT INCLUDED:

- Select Touch Wall Transmitter (2WWC)



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	5968	3915
Energy Use (Watts)	69	42
Energy Costs (Yearly)	\$20	\$13
Airflow Efficiency (CFM/W)	87	93

52" Nola™



52" Nola™

NL-ORB

Oil Rubbed Bronze Finish
Oil Rubbed Bronze Blades



NL-BN

Brushed Nickel Finish
Silver Blades



FEATURES:

- 52" blades **(included)**
- 172 x 15mm motor
- 3-speed forward, reversing
- 14° blade pitch
- 1 x 100W "JDE 11" halogen bulb (E11)
- Box weight 22.5 lb
- Remote Control **(included)**



OPTIONS NOT INCLUDED:

- Select Touch Wall Transmitter (2WWC)



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	4133	2109
Energy Use (Watts)	64	37
Energy Costs (Yearly)	\$17	\$9
Airflow Efficiency (CFM/W)	65	57

52" Grand Marquis™

GMRP-BN

Brushed Nickel Finish
Cherry/Mahogany Blades
(shown with Cherry Blades)
Alabaster Glass



GMRP-BN

Brushed Nickel Finish
Cherry/Mahogany Blades
(shown with Mahogany Blades)
Alabaster Glass



FEATURES:

- 52" reversible blades **(included)**
- Additional blade options available. Recommend 44", 52" and designer blades. See pages 64-68.
- Pull chain control
- Flush mount capability
- LK65 light kit **(included)**
- 188 X 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Mounts to sloped ceilings up to 22°, 5/12 pitch
- Box weight 22.3 lb

OPTIONS NOT INCLUDED:

- Full function remote control requires purchase of RCR - receiver, RC2 - housing
- RCT - Remote Control Transmitter
 - or
 - 2WWC - Select Touch Wall Transmitter



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	5498	3580
Energy Use (Watts)	78	46
Energy Costs (Yearly)	\$22	\$13
Airflow Efficiency (CFM/W)	71	78

GMRP-CW

Chalk White Finish
Chalk White Blades
Alabaster Glass



GMRP-ORB

Oil Rubbed Bronze fan comes with
Dark Walnut/Oil Rubbed Bronze Blades
(shown with Dark Walnut Blades)
Alabaster Glass



GMRP-ORB

Oil Rubbed Bronze Finish
Dark Walnut/Oil Rubbed Bronze Blades
(shown with Oil Rubbed Bronze Blades)
Alabaster Glass



52" Lafayette™



LF-AC

Antique Copper Finish
Antique Copper/Mahogany Blades
(shown with Antique Copper Blades)

FEATURES:

- 52" reversible blades **(included)**
- Additional blade options available.
Recommend
44", 52" and designer blades. See pages 64-68.
- Light kit adaptable. See pages 70-74.
- Pull chain control
- Flush mount capability
- 188 x 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 22°, 5/12 pitch
- Box weight 29 lb

OPTIONS NOT INCLUDED:

- Full function remote control requires purchase of RCR - receiver, RC2 - housing
- RCT - Remote Control Transmitter
or
 - 2WWC - Select Touch Wall Transmitter

ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	5515	3635
Energy Use (Watts)	79	46
Energy Costs (Yearly)	\$23	\$13
Airflow Efficiency (CFM/W)	70	79

LF-ORB

Oil Rubbed Bronze Finish
Dark Walnut/Oil Rubbed Bronze Blades
(shown with Oil Rubbed Bronze blades)



LF-CW

Chalk White Finish
Chalk White Blades



LF-BN

Brushed Nickel Finish
Cherry/Mahogany Blades
(shown with Mahogany Blades)



52" Envoy™ with Uplight


EN2-ORB

Oil Rubbed Bronze Finish
Dark Walnut/Oil Rubbed Bronze Blades
(shown with Oil Rubbed Bronze Blades)



EN2-BN

Brushed Nickel Finish
Cherry/Mahogany Blades
(shown with Mahogany Blades)

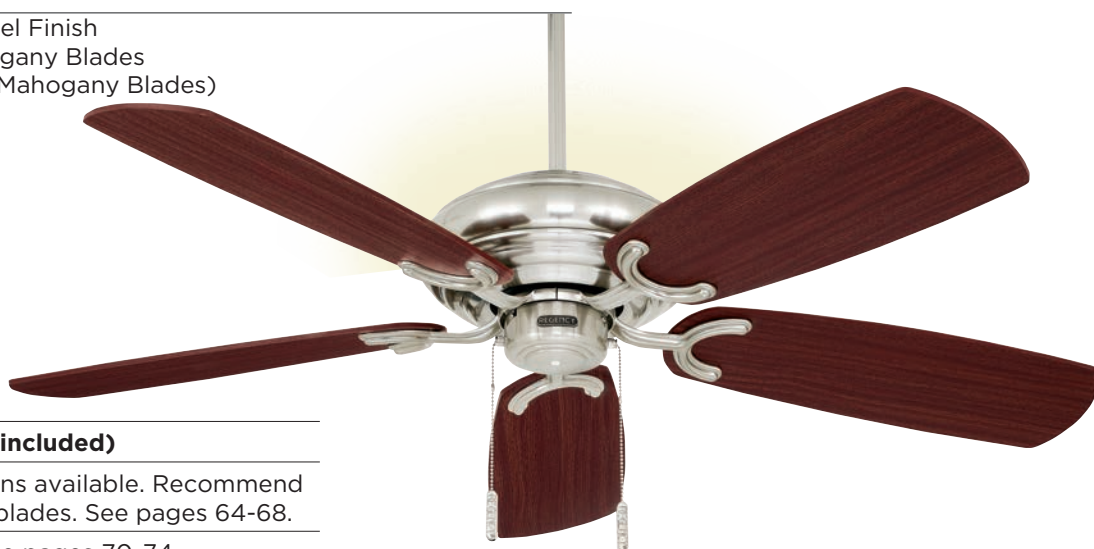

FEATURES:

- 52" reversible blades **(included)**
- Additional blade options available. Recommend 44", 52" and designer blades. See pages 64-68.
- Light kit adaptable. See pages 70-74.
- Built in Uplight
- Pull chain control
- 188 x 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 33°, 8/12 pitch
- 4 x 25W candelabra (E12) upper light (included)*
- Box weight 19.8 lb



OPTIONS NOT INCLUDED:

- Full function remote control requires purchase of RCRD - receiver, RC2 - housing
- RCTD - Remote Control Transmitter
- or
- 2WWCD - Select Touch Wall Transmitter

ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	5050	3485
Energy Use (Watts)	63	38
Energy Costs (Yearly)	\$18	\$11
Airflow Efficiency (CFM/W)	80	92

EN2-CW

Chalk White Finish
Chalk White Blades



52" Marquis™

MR2-DF

Driftwood Finish
Driftwood Blades



MR2-BN

Brushed Nickel Finish
Cherry/Mahogany Blades
(shown with Cherry blades)

LK9-BN light kit
(Light kit sold separately)



FEATURES:

- 52" blades **(included)**
- Additional blade options available. Recommend 44", 52" and designer blades. See pages 64-68.
- Light kit adaptable. See pages 70-74.
- Flush mount capability
- 188 x 15mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Mounts to sloped ceilings up to 22°, 5/12 pitch
- Box weight 21.6 lb

OPTIONS NOT INCLUDED:

- Full function remote control requires purchase of RCR - receiver, RC2 - housing
- RCT - Remote Control hand held Transmitter or
 - 2WWC - Select Touch Wall Transmitter



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	5210	3497
Energy Use (Watts)	54	39
Energy Costs (Yearly)	\$19	\$12
Airflow Efficiency (CFM/W)	97	90



MR2-BB

Burnished Brass Finish

Walnut/Medium Oak Blades (shown with Walnut Blades)

LK82 LED light kit (Light kit sold separately)



MR2-ORB

Oil Rubbed Bronze Finish

Dark Walnut/Oil Rubbed Bronze Blades
(shown with Oil Rubbed Bronze Blades)



MR2-SS

Satin Steel Finish

Cherry/Maple Blades (shown with Cherry Blades)
LK9-SS light kit (Light kit sold separately)



MR2-AW

Appliance White Finish

Appliance White Blades



MR2-AC

Antique Copper Finish

Antique Copper/Mahogany Blades
(shown with Antique Copper Blades)



MR2-MB

Matte Black Finish

Matte Black Blades



MR2-CW

Chalk White Finish

Chalk White Blades

42" Countess™


CT-AW

Appliance White Finish
Appliance White Blades



CT-ORB

Oil Rubbed Bronze Finish
Dark Walnut/Oil Rubbed Bronze Blades
(shown with Oil Rubbed Bronze Blades)

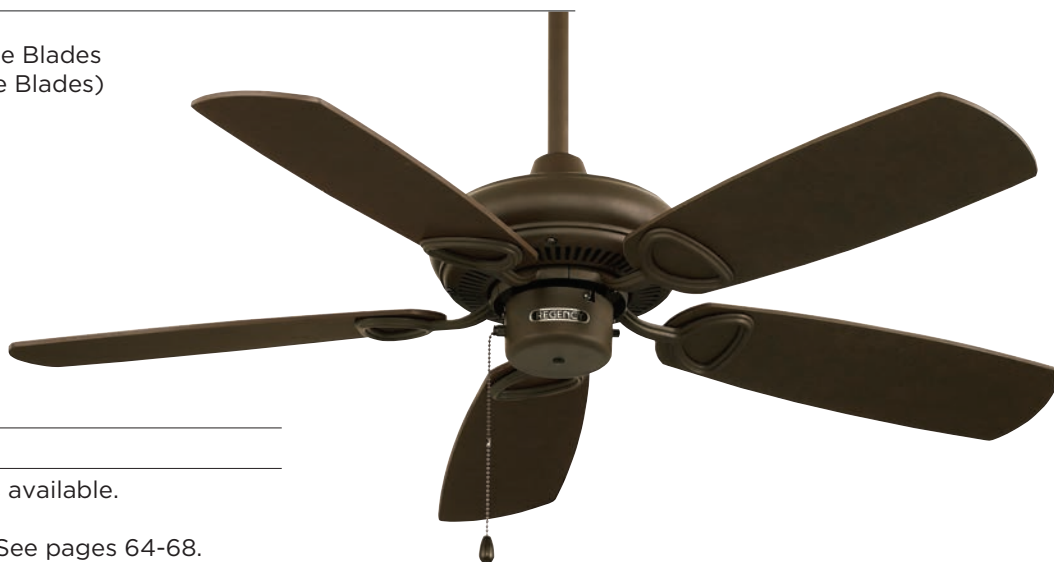

FEATURES:

- 42" blades **(included)**
- Additional blade options available. Recommend 27", 36" and 42" blades. See pages 64-68.
- Light kit adaptable. See pages 70-74.
- Pull chain control
- Flush mount capability
- 153 x 10mm motor
- 3-speed, reversing
- 14° blade pitch
- 4" downrod included
- Mounts to sloped ceilings up to 22°, 5/12 pitch
- Box weight 15 lb

OPTIONS NOT INCLUDED:

- Universal Remote Control (URC)
- Select Touch Wall Transmitter (2WWC)



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	3051	2301
Energy Use (Watts)	47	31
Energy Costs (Yearly)	\$14	\$9
Airflow Efficiency (CFM/W)	63	74

42" Countess™



52" Professional Fan

PFES52-ORB

Oil Rubbed Bronze Finish
Oil Rubbed Bronze/Dark Walnut Blades
(shown with Oil Rubbed Bronze Blades)



PFES52-SS

Satin Steel Finish
Silver/Cherry Blades
(shown with Cherry Blades)



FEATURES:

- 52" blades **(included)**
- Light kit adaptable. See pages 70-74.
- Pull chain control
- Flush mount capability
- 153 x 15mm motor
- 3-speed, reversing
- Detachable switch housing
- Triple capacitor
- 12° blade pitch
- 4" downrod included
- 6 ft. lead wires
- Mounts to sloped ceilings up to 28°, 6/12 pitch
- Box weight 17.6 lb

OPTIONS NOT INCLUDED:

- Universal Remote Control (URC)



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	5820	3722
Energy Use (Watts)	62	35
Energy Costs (Yearly)	\$19	\$11
Airflow Efficiency (CFM/W)	93	106

PFES52-AW

Appliance White Finish
Appliance White 52" Blades



PF42-AW

Appliance White Finish
Appliance White **42" Blades**

PFES52-AB

Antique Brass Finish
Walnut/Medium Oak Blades
(shown with Walnut Blades)



PFES52-CW

Chalk White Finish
Chalk White Blades



56" Industrial

IND-WH

White Industrial Ceiling Fan
White Metal Blades



FEATURES:

- 188 x 15mm high torque motor
- 56" blades **(included)**
- 3 contoured metal blades
- 24" downrod included
- Single speed/300 RPM free run
- Current draw .75 AMPS
- 6 ft. lead wires
- Box weight 17.0 lb
- UL listed

Approved for residential and commercial use when blades are installed at least 10 feet above the floor.

ENERGY GUIDE

STANDARD	HIGH SPEED
Airflow (CFM)	8708
Energy Use (Watts)	97
Airflow Efficiency (CFM/W)	90

IND-MB

Matte Black Industrial Ceiling Fan
Matte Black Metal Blades



IND-ORB

Oil Rubbed Bronze Industrial Ceiling Fan
Oil Rubbed Bronze Metal Blades



Accessories Sold Separately



FFC1AW-G* - White/Almond
3-speed, fan control, 2-wire.
*Includes white and almond knobs.



FFCS-2 - White
FFCSA-2 - Almond
FFCSI-2 - Ivory
4-speed sliding, fan control, 2-wire, 1.5 amp.

Effective area served by each fan installed for various ceiling heights:

Ceiling Height	Effective Sq. Ft. Area Served
20 ft.	3500
30 ft.	2800
40 ft.	1700

Uses Industrial Downrods

I12-FINISH 12"
I36-FINISH 36"
I72-FINISH 72"





MOTOR ASSEMBLY / MIX & MATCH

Allow a subtle breeze, captured in a custom design built to blend motion and style, to infuse your space and invigorate your senses. Create your perfect ceiling fan by selecting from an incredible assortment of fan motors, blades, light kits and controls constructed with superior quality, efficiency, durability and safety. Whether indoors or outside, a cozy nook or a grand entertaining area, nourish your environment in style with the vitality only fresh air can provide.

Grander™ MOTOR ASSEMBLY

BLADES AND LIGHT KIT SOLD SEPARATELY



GN-ORB : Oil Rubbed Bronze Motor Assembly

GN60-ORB Oil Rubbed Bronze Blades

LK272W-ORB LED Light Kit

FEATURES:

- 60" and 72" Grander blades available, see page 54. Blades are sold separately.
- Light kit adaptable. See pages 70-74.
- **DC-165mm motor**
- 6-speed
- 13.5° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 22°, 5/12 pitch
- Box weight 22.05 lb
- Remote Control **(included)**



OPTIONS NOT INCLUDED:

- Select Touch Wall Transmitter (DCWC3)



Note: Multiple Grander fans cannot operate on the same circuit. Each Grander fan must have its own power switch.

BLADES AND LIGHT KIT SOLD SEPARATELY

GN-CW : Chalk White Motor Assembly

GN72-CW Chalk White Blades



GN-BN : Brushed Nickel Motor Assembly

GN60-MH Mahogany Blades



DC

60" BLADES / ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	7393	5027
Energy Use (Watts)	30	20
Energy Costs (Yearly)	\$8	\$6
Airflow Efficiency (CFM/W)	249	251

72" BLADES / ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	9334	6769
Energy Use (Watts)	31	22
Energy Costs (Yearly)	\$9	\$6
Airflow Efficiency (CFM/W)	304	308

Grander™ Blade Options

Available in 60" and 72" sizes, these custom blades have been handcrafted specifically for the Grander fans. Select from many different blade finishes to customize the Grander fans to match any décor.

	GN60-AC GN72-AC (Antique Copper)
	GN72-CR (Cherry)
	GN60-CW GN72-CW (Chalk White)
	GN60-DW GN72-DW (Dark Walnut)
	GN60-MH GN72-MH (Mahogany)
	GN60-ORB GN72-ORB (Oil Rubbed Bronze)
	GN60-SS GN72-SS (Satin Steel)
	GN60-TK GN72-TK (Teak)

Hover™ MOTOR ASSEMBLY

BLADES SOLD SEPARATELY

Dark Walnut - **56HVDW**
Silver - **56HVSS**
Cherry - **56HVCR**

HV-BN : Brushed Nickel Motor Assembly
56HVDW Dark Walnut Blades



HV-BN : Brushed Nickel Motor Assembly
56HVSS Silver Blades



HV-BN : Brushed Nickel Motor Assembly
56HVCR Cherry Blades



FEATURES:

- **DC-125mm motor**
- Blade sets sold separately. 56HV series only.
- 6-speed, reversing
- 14° blade pitch
- 6" downrod
- Mounts to sloped ceilings up to 23°, 5/12 pitch
- LED 16W frosted glass
- 3000K Warm white color temperature
- Light output is 1200 lumens-delivered
- L70 - 36,000 hours
- Box weight 13.8 lb
- Remote Control **(included)**



OPTIONS NOT INCLUDED:

- Select Touch Wall Control (DCWC3)
- Light kit cover

Note: Multiple Hover fans cannot operate on the same circuit. Each Hover fan must have its own power switch.



ENERGY GUIDE		
STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	6529	4281
Energy Use (Watts)	32	21
Energy Costs (Yearly)	\$9	\$6
Airflow Efficiency (CFM/W)	204	204

Gladiator™

MOTOR ASSEMBLY

BLADES AND LIGHT KIT SOLD SEPARATELY

GL3-AC : Antique Copper Motor Assembly
TB60-AC Antique Copper Blades
LK272-AC LED Light Kit



GL3-SS : Satin Steel Motor Assembly
TB60-MP Maple Blades



FEATURES:

- 60" Gladiator blades available. See page 58. Blades are sold separately.
- Light kit adaptable. See pages 70-74.
- **DC-125mm motor**
- 6-speed, reversing
- 16° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 22°, 5/12 pitch
- Box weight 22.7 lb
- Remote Control **(included)**



OPTIONS NOT INCLUDED:

- Select Touch Wall Transmitter (DCWC3)



Note: Multiple Gladiator fans cannot operate on the same circuit. Each Gladiator fan must have its own power switch.

DC

ENERGY GUIDE		
STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	6064	4516
Energy Use (Watts)	31	22
Energy Costs (Yearly)	\$9	\$6
Airflow Efficiency (CFM/W)	193	205

BLADES AND LIGHT KIT SOLD SEPARATELY


GL3-CW : Chalk White Motor Assembly

TB60-CW Chalk White Blades



GL3-ORB : Oil Rubbed Bronze Motor Assembly

TB60-ORB Oil Rubbed Bronze Blades

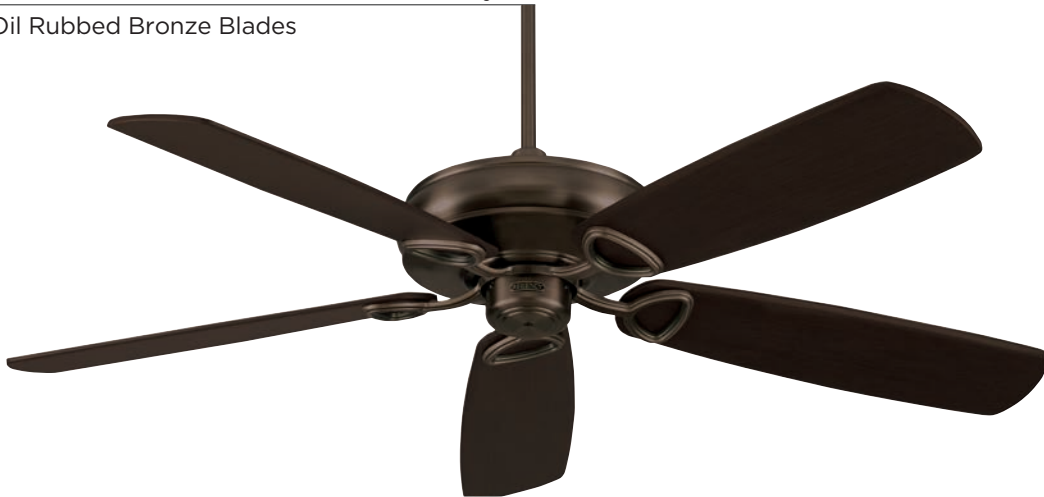

GL3-BN : Brushed Nickel Motor Assembly

TB60-CR Cherry Blades

LK65-BN Light Kit



60" Gladiator™ Blade Options

Thicker and wider than Regency's standard wood blades, the 60" TB60 blades offer the perfect proportions for the powerful Gladiator fans. Select from many different fan finishes to complement any style and décor.

	TB60-AC (Antique Copper)		
	TB60-AW (Appliance White)		TB60-MB (Matte Black)
	TB60-CR (Cherry)		TB60-MHS (Mahogany)
	TB60-CW (Chalk White)		TB60-MP (Maple)
	TB60-DF (Drift Wood)		TB60-ORB (Oil Rubbed Bronze)
	TB60-DG (Walnut)		TB60-SS (Satin Steel)
	TB60-DW (Dark Walnut)		TB60-TK (Teak)

Tropic Air™

MOTOR ASSEMBLY

BLADES AND LIGHT KIT SOLD SEPARATELY

TA2-ORB : Oil Rubbed Bronze Motor Assembly
PP52WAL Walnut ABS Blades



FEATURES:

- Blade sets sold separately. Recommend 52" blades. See pages 64-68.
- Light kit adaptable. See pages 70-74.
- 188 x 25mm motor
- 3-speed, reversing
- 20° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 33°, 8/12 pitch
- Pull chain control
- Box weight 22 lb
- UL Listed : Wet

OPTIONS NOT INCLUDED:



- Universal Remote Controls (URC-WL)/ (URC-WLES)
- Select Touch Wall Transmitter (2WWC) (Control indoor mount only)



ENERGY GUIDE		
STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	5530	3630
Energy Use (Watts)	63	39
Energy Costs (Yearly)	\$20	\$13
Airflow Efficiency (CFM/W)	88	93


LX2™ MOTOR ASSEMBLY with Uplight



LX2™ MOTOR ASSEMBLY with Uplight

BLADES AND LIGHT KIT SOLD SEPARATELY

LX2-ORB : Oil Rubbed Bronze Motor Assembly
56ORB Oil Rubbed Bronze Blades

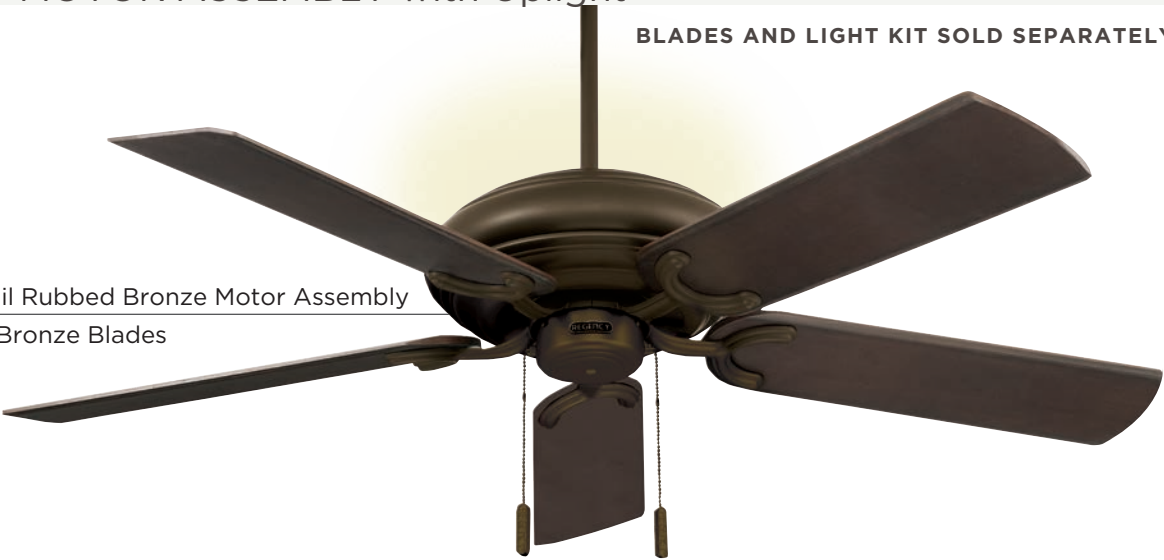

LX2-BN : Brushed Nickel Motor Assembly
56AWS Appliance White Blades
LK14L-BN LED Light Kit



FEATURES:

- Blade sets sold separately. Recommend 52" or 56" blades. See pages 64-68.
- Light kit adaptable. See pages 70-74.
- Built in Uplight
- Pull chain control
- 188 x 20mm motor
- 3-speed, reversing
- 14° blade pitch
- 6" downrod included
- Mounts to sloped ceilings up to 33°, 8/12 pitch
- 4 x 25W candelabra (E12) upper light (included)*
- Box weight 19.8 lb

LED

OPTIONS NOT INCLUDED:

- Full function remote control requires purchase of RCRD - receiver, RC2 - housing
- RCTD - Remote Control Transmitter or
 - 2WWCD - Select Touch Wall Transmitter




ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	6540	4088
Energy Use (Watts)	72	44
Energy Costs (Yearly)	\$27	\$14
Airflow Efficiency (CFM/W)	91	93

BLADES AND LIGHT KIT SOLD SEPARATELY

MX2-AC : Antique Copper Motor Assembly
52TK Teak Blades
LK80A Light Kit

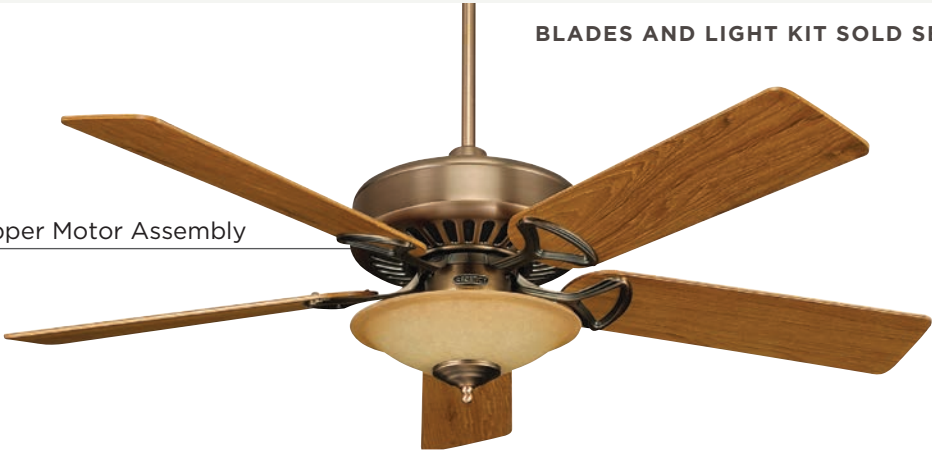

MX2-ORB : Oil Rubbed Bronze Motor Assembly
52XDW Dark Walnut Designer Blades



MX2-BN :
Brushed Nickel Motor Assembly
52XCR Cherry Designer Blades
LK272W-BNW LED Light Kit



FEATURES:

- Blade sets sold separately. Recommend 52" and 56" blades. See pages 64-68.
- Light kit adaptable. See pages 70-74.
- Pull chain control
- Flush mount capability
- 188 x 22mm motor
- 3-speed, reversing
- 16° blade pitch
- 3" and 6" downrods included
- Mounts to sloped ceilings up to 22°, 5/12 pitch
- Box weight 19.8 lb

OPTIONS NOT INCLUDED:

- Full function remote control requires purchase of RCR - receiver, RC2 - housing
- RCT - Remote Control Transmitter or
 - 2WWC - Select Touch Wall Transmitter



ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
Airflow (CFM)	6084	3960
Energy Use (Watts)	87	50
Energy Costs (Yearly)	\$25	\$14
Airflow Efficiency (CFM/W)	70	79



MX2-BB : Burnished Brass Motor Assembly
52XDW Dark Walnut Designer Blades
LK9-BB Burnished Brass Light Kit



MX2-CW : Chalk White Motor Assembly
52XCW Chalk White Designer Blades
LK82 LED Light Kit



MX2-CW : Chalk White Motor Assembly
52CW Chalk White Blades
LK60-CW Chalk White Light Kit



MX2-SS : Satin Steel Motor Assembly
52MP Maple Blades



MX2-AW : Appliance White Motor Assembly
52AWS Appliance White Blades



MX2-MB : Matte Black Motor Assembly
52MB Matte Black Blades

52" Designer Blades

Wide, 52" rounded oar shaped exquisite wood blades are available in the most popular blade finishes.

	52XAC (Antique Copper)		52XMB (Matte Black)
	52XCR (Cherry)		52XMH (Mahogany)
	52XCW (Chalk White)		52XORB (Oil Rubbed Bronze)
	52XDF (Driftwood)		52XSS (Satin Steel)
	52XDW (Dark Walnut)		52XTK (Teak)

54" Carved Wood Blades

Regency’s carved wood designer blades have been meticulously carved by hand so that each blade is a unique work of art. The entire collection allows you to truly customize a ceiling fan to match your personal styles.


	WL52MH (Mahogany)
	WL52NAT (Natural)

52" Outdoor ABS Plastic Blades

FAN/MOTOR ASSEMBLY SOLD SEPARATELY



PP52WAL
52" Walnut

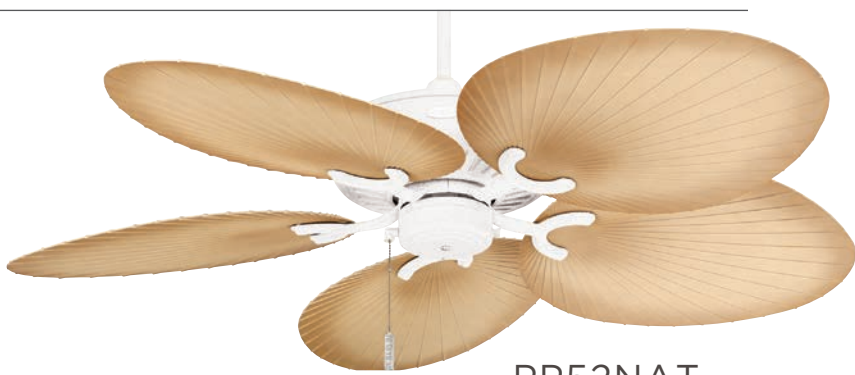

PP52NAT
52" Natural




PP52AW
52" Appliance White


52OAAW
52" Appliance White



52OAWI
52" Matte Black



52OAORB
52" Oil Rubbed Bronze



52" Outdoor ABS Plastic Blades

FAN/MOTOR ASSEMBLY SOLD SEPARATELY

PL52MHS
52" Mahogany



PL52AW
52" Appliance White



PL52NAT
52" Natural

52CMORB
52" Oil Rubbed Bronze



Additional Blades

	Size	Color	Description	Blade Tip	Finish		Size	Color	Description	Blade Tip	Finish
	52"	ACW	Antique Cherrywood	Square	Matte		52" 56"	MB	Matte Black	Square	Matte
	52" 56"	AC	Antique Copper	Square	Matte		44" 52" 56"	LG	Medium Oak	Pointed	Matte
	27" 36" 44" 52" 56"	AWS	Appliance White	Square	Matte		52" 56"	LGS	Medium Oak	Square	Matte
	44" 52" 56"	CW	Chalk White	Square	Matte		44" 52" 56"	ORB	Oil Rubbed Bronze	Square	Matte
	44" 52"	CR	Cherry	Square	Matte		52"	SSS	Satin Steel	Square	Matte
	44" 52" 56"	DWS	Dark Walnut	Square	Matte		52" 56"	TK	Teak	Square	Matte
	52"	NAT	Light Natural Oak	Pointed	Matte		52"	UFS	Unfinished Oak	Square	Matte
	52"	NATS	Light Natural Oak	Square	Matte		52"	DG	Walnut	Pointed	Matte
	44" 52" 56"	MHS	Mahogany	Square	Matte		52"	WS	White	Square	Matte
	44" 52"	MP	Maple	Square	Matte						

Downrods



DOWNRODS

Item: D(size)-(Finish)

Example: D12-BB — is 12" Burnished Brass Downrod.

Available Sizes: 12", 18", 24", 36", 48", 60" and 72" (available most colors)

Antique Brass	Antique Copper	Appliance White	Burnished Brass	Brushed Nickel	Chalk White	Driftwood	Liquid Nickel	Matte Black	Matte White	Oil Rubbed Bronze	Satin Steel
(AB)	(AC)	(AW)	(BB)	(BN)	(CW)	(DF)	(LN)	(MB)	(MW)	(ORB)	(SS)

WET LOCATION DOWNRODS

DL12-AW, BNW, DF, LN, MB, MW, ORB

DL18-BNW, DF, LN, MW

DL24-AW, BNW, DF, LN, MB, MW, ORB

DL36-AW, BNW, DF, LN, MW, ORB

DL48-BNW, DF, LN, MW

DL60-BNW, DF, LN, MB, MW, ORB

DL72-BNW, DF, LN, MW

LED Light Kits

COMPATIBLE WITH MANY POPULAR CEILING FANS

LED



Indoor
Only



LK14L-BN



LK14L-ORB



LK14L-SS

FEATURES:

- Dimmable LED Light Kit with White Glass
- One 22-Watt LED
- Leading Edge Dimmer (Compatible with Traditional Incandescent Dimming)
- 3,000K Soft White Color Temperature
- Light Output is 1,850 Lumens
- Lifetime Estimate- 40,000 Hours
- Energy Efficient
- Width: 12"
- Height: 3-1/2"

LED Light Kits

COMPATIBLE WITH MANY POPULAR CEILING FANS

LED



FEATURES:

- Dimmable LED Light Kit with White Glass
- Three 4.5-Watt E12 LED bulbs
- Leading Edge Dimmer (Compatible with Traditional Incandescent Dimming)
- 2700K Soft White Color Temperature
- Light Output is 1,500 Lumens
- Lifetime Estimate- 15,000 Hours
- Energy Efficient
- Width: 12"
- Height: 4-5/8"

Indoor
Only



LK82-(FINISH)
comes with BN
**(Caps and finials
available in all colors)**

CAPS-FINISH

Caps and finials available separately in all Regency finishes.

LED Light Kits

COMPATIBLE WITH MANY POPULAR CEILING FANS

LED



FEATURES:

- Dimmable, 16-Watt LED Light Kit with White Glass
- Leading Edge Dimmer (Compatible with Traditional Incandescent Dimming)
- 2700K Soft White Color Temperature
- Light Output Is 1,200 Lumens
- Lifetime to 70% Luminous Flux - 30,000 Hours
- Lifetime to 50% Luminous Flux - 50,000 Hours
- Energy Efficient
- Width: 11"
- Height: 4-7/8"

LED lights have a reputation for energy efficiency and a lifespan that outpaces traditional light bulbs by decades. Homeowners not only lower energy bills by upgrading incandescent bulbs to LED but, because LEDs last 25 times longer, they save even more by replacing bulbs less!

The Regency LED light kits give customers an attractive energy-saving lighting option—one of the first that's compatible with many different ceiling fans.

Indoor/
Outdoor
Location



LK12W-AW
(Wet Location)



LK12W-BNW
(Wet Location)



LK12W-DF
(Wet Location)

Indoor
Only



LK12-AC



LK12W-MB
(Wet Location)



LK12-CW



LK12W-ORB
(Wet Location)

LED Light Kits

COMPATIBLE WITH MANY POPULAR CEILING FANS

LED

FEATURES:

- Dimmable, 20-Watt LED Light Kit with White Glass
- Leading Edge Dimmer (Compatible with Traditional Incandescent Dimming)
- 2700K Soft White Color Temperature
- Light Output Is 1700 Lumens
- Comparable to 100-Watt Incandescent Bulb
- Lifetime to 70% Luminous Flux - 35,000 Hours
- Lifetime to 50% Luminous Flux - 50,000 Hours
- Energy Efficient
- Width: 13.5"
- Height: 4"

Indoor
Only



LK270-CW



LK270-SS

FEATURES:

- Dimmable, 21-Watt LED Light Kit with White Glass
- Leading Edge Dimmer (Compatible with Traditional Incandescent Dimming)
- 3000K Soft White Color Temperature
- Light Output Is 1800 Lumens
- Comparable to 100-Watt Incandescent Bulb
- Lifetime to 70% Luminous Flux - 30,000 Hours
- Lifetime to 50% Luminous Flux - 50,000 Hours
- Energy Efficient
- Width: 13.5"
- Height: 4.75"

Indoor
Only



LK272-AC

Indoor/Outdoor
Location



LK272W-AW
(Wet Location)



LK272W-BNW
(Wet Location)



LK272W-ORB
(Wet Location)

Light Kits

CAPS-FINISH

Caps and finials available separately in all Regency finishes.

Photos for light kit style only.

Light kit may not be available in color shown.



LK9-(finish)

10"W x 3-1/2"H, (2-60W E12)

Available in: AB, AW, BB, BN, CW, ORB, SS



LK9A-(finish) (Amber Glass)

10"W x 3-1/2"H, (2-60W E12)

Available in: ORB



LK14-(finish)

12"W x 3-1/2"H, (1-100W JDE 11)

Available in: BN, SS



LK14A-(finish) (Amber Glass)

12"W x 3-1/2"H, (1-100W JDE 11)

Available in: AC, ORB



LK32A-(finish) (Amber Glass)

14"W x 6-1/4"H, (3-60W E12)

Available in: ORB



LK41P

11"W x 5"H, (3-60W E12)

Comes with AW (Caps and finials available in all colors)



LK41P-A (Amber Glass)

11"W x 5"H, (3-60W E12)

Comes with ORB (Caps and finials available in all colors)



LK54

12"W x 7-1/2"H, (3-60W E12)

Comes with AW (Caps and finials available in all colors)



LK54A (Amber Glass)

12"W x 7-1/2"H, (3-60W E12)

Comes with ORB (Caps and finials available in all colors)



LK60-(finish)

12-1/2"W x 5-1/2"H, (3-60W E12)

Available in: AW, BN, CW, ORB, SS



LK60A-(finish) (Amber Glass)

12-1/2"W x 5-1/2"H, (3-60W E12)

Available in: AC, ORB



LK65-(finish)

12-1/2"W x 5"H, (3-60W E12)

Available in: AW, BB, BN, CW, DI, SS



LK65A-(finish) (Amber Glass)

12-1/2"W x 5"H, (3-60W E12)

Available in: AC, ORB



LK80-(finish)

12"W x 4-5/8"H, (3-60W E12)

Caps and finials available in all colors; comes with BN



LK80A-(finish) (Amber Glass)

12"W x 4-5/8"H, (3-60W E12)

Caps and finials available in all colors; comes with ORB



LK301T-(finish)

12"W x 6-1/2"H, (3-60W E12)

Available in: AW, ORB

Damp Location Light Kits



LK427D-(finish)

9-1/2"W x 6"H, (4-40W E12)

Available in: AW, ORB

Wet Location Light Kits



LK90W-(finish)

11"W x 5-3/8"H, (2-60W E12)

Available in: AW, BNW, DF, MB, ORB



LK95W-(finish)

10-1/8"W x 6"H, (2-13W E26)

Available in: AW, ORB

Energy Saving Wet Location Light Kits



LK109ESW-(finish)

10-1/8"W x 5-7/8"H, (1-22W 2-Pin Circline Fluorescent)

Available in: AW

Fitters



F401N-AB
12-1/2"W x 3-1/2"H,
(4-40W E12)



F401N-AW
12-1/2"W x 3-1/2"H,
(4-40W E12)



F401N-BB
12-1/2"W x 3-1/2"H,
(4-40W E12)



F401N-BN
12-1/2"W x 3-1/2"H,
(4-40W E12)



F401N-CW
12-1/2"W x 3-1/2"H,
(4-40W E12)



F401N-ORB
12-1/2"W x 3-1/2"H,
(4-40W E12)



F401N-SS
12-1/2"W x 3-1/2"H,
(4-40W E12)

Note: Photos of light kit and fitter sockets may not represent current sockets. Bulb types listed may not apply to all finishes.

Glass Shades



G2100 Alabaster White Swirl
6"W x 5"H, (Set of 4)



G2100A Amber Glass
6"W x 5"H, (Set of 4)

Energy Saving LED




**LK270LED
BULB**
20 watt 2700K
LED with driver



**LK272LED
BULB**
21 watt 3000K
LED with driver



VTLED
16 watt 3000K
LED with driver



LK12LED
16 watt 2700K
LED with driver



**LK82LED
BULB**
LED bulb

Energy Saving Fluorescent Bulbs



13W-CFL
13 watt spiral CFL
(medium base)

Pull Chains & Fobs



TSL1-304
Walnut



TSL6-304
Light Oak



TSL4-304
White



REGFOB-(FINISH)
AB, BR, GUN, SS









Ceiling Accessories



SCK-(FINISH)*
Sloped Ceiling Kit 48° Maximum slope
Available in: AW, BN, CW, MB, ORB, SS
Uses 1/2" rod only

* Cannot be used with canopy mounted remote fans or with fans used outdoors!

Wall Controls - Fan and Light

OPTIONAL SELECT TOUCH WALL TRANSMITTERS		RECEIVER NEEDED	Colors:
2WWC - White 2WWC-A - Almond Full fan and light control using a standard 2-wire circuit. Works in place of a single circuit on/off wall switch. Controls 3 speeds, reverse, and light on/off, plus full range dimmer with memory. (Can be used with RCT transmitter.) (Single Fan Use) 	2WWCD - White 2WWCD-A - Almond Full fan and light control using a standard 2-wire circuit. Works in place of a single circuit on/off wall switch. Controls 3 speeds, reverse, and uplight and optional downlight independently with full range dimmer with memory. (Can be used with RCTD transmitter.) (Single Fan Use) 	URC  RCR  RCRD 	 white  almond  RC2

Fan	Page				
Andros*	22	X		included with fan	none
Artiste 60"***	17		DCWC3 6-speed wall control	none	none
Artiste 72"***	16		DCWC3 6-speed wall control	none	none
Bimini*	20	X		included with fan	none
Cabana*	29	X		URC-WL	none
Cayman*	23	X		URC-WL	none
Ciara*	28	X		URC-WL	none
Countess	44	X		URC	none
Deuce*	33	X		included with fan	none
Envoy	40-41		X	RCRD	RC2
Excel	62-63	X		RCR	RC2
Gladiator**	56-57		DCWC3 6-speed wall control	none	none
Grand Marquis	36-37	X		RCR	RC2
Grander**	52-53		DCWC3 6-speed wall control	none	none
Hover**	55		DCWC3 6-speed wall control	none	none
Lafayette (LF)	38-39	X		RCR	RC2
LX (LX2)	61		X	RCRD	RC2
Marquis	42-43	X		RCR	RC2
Module**	18		DCWC3 6-speed wall control	none	none
Nola	35	X		included with fan	none
Oasis*	24-25	X		URC-WL	none
Patio Pro*	31	X		URC-WL	none
Spire*	21	X		included with fan	none
Tier*	15	X		included with fan	none
Tropic Air*	59	X		URC-WL	none
Vail**	8-9		DCWC3 6-speed wall control	none	none
Vantage**	6-7		DCWC3 6-speed wall control	none	none
Vera Cruz*	26-27	X		URC-WL	none
Verge*	19	X		included with fan	none

* Fans must be put into reverse position manually from fan switch when using the 2WWC.

**Multiple fans not to be operated using a single handheld or wall controller.

National Electrical Code: Fans not using wall controllers must have external wall switch to control power.

Wall Controls - Fan and Light

OPTIONAL FAN & LIGHT WALL CONTROLS

FFCSL-2 - White
FFCSLA-2 - Almond
FFCSLI-2 - Ivory
 4-speed sliding fan and light control, 3-wire, 1.5 amp/300 watt.




FCL-E - White
 3-speed fan and on/off light control for operating fans with Energy Star (CFL) light kits, 3-wire, 1.25 amp/300 watt.



Fan	Page	
Cabana	29	X
Cayman	23	X
Ciara	28	X
Countess	44	X
Deuce	33	X
Excel	62-63	X
Grand Marquis	36-37	X

Fan	Page	
Lafayette (LF)	38-39	X
Marquis	42-43	X
Oasis	24-25	X
Patio Pro	31	X
Pro Series - 52"	46-47	X
Vera Cruz	26-27	X

Colors:



OPTIONAL FAN ONLY WALL CONTROLS

FFC1AW-G- White/Almond
 (includes white and almond knobs)
 3-speed fan control, 2-wire.



FFCS-2 - White
FFCSA-2 - Almond
FFCSI-2 - Ivory
 4-speed sliding fan control, 2-wire, 1.5 amp.






FFC-M - White
 3-speed control for operating multiple fans (3-5) on the same circuit, 5 amp, 2-wire.









Fan	Page	FFC1AW-G- White/Almond	FFCS-2 - White	FFC-M - White
Bimini	20	X	X	X
Cabana	29	X	X	X
Cayman	23	X	X	X
Ciara	28	X	X	X
Countess	44	X	X	X
Excel	62-63	X	X	X
Grand Marquis	36-37	X	X	X
Industrial	48-49	X	X	X
Lafayette (LF)	38-39	X	X	X
Marquis	42-43	X	X	X
Oasis	24-25	X	X	X
Patio Pro	31	X	X	X
Pro Series - 52"	46-47	X	X	X
Vera Cruz	26-27	X	X	X

FFC-M Controller: Fans used in parallel connection will vary in speed, +/- 20%

Remote Controls - Fan and Light

		OPTIONAL FULL FUNCTION REMOTE CONTROL		
		Transmitter RCT 	Receiver RCR 	Receiver Housing RC2-(color) 
Fan	Page			
Excel	62-63	X	X	X
Grand Marquis	36-37	X	X	X
Lafayette (LF)	38-39	X	X	X
Marquis	42-43	X	X	X

		OPTIONAL FULL FUNCTION REMOTE CONTROL (for fans with Mood Glow™ Uplight)		
		Transmitter RCTD 	Receiver RCRD 	Receiver Housing RC2-(color) 
Fan	Page			
Envoy	40-41	X	X	X
LX (LX2)	61	X	X	X
Strasburg	32	X	included with fan	N/A

		OPTIONAL UNIVERSAL REMOTE CONTROL	OPTIONAL WET LOCATION UNIVERSAL REMOTE CONTROL	
		Transmitter and Receiver URC* 	Wet Location Transmitter and Receiver URC-WL* 	Transmitter and Receiver URC-WLES** For fans with fluorescent light kits (including wet location) 
Fan	Page			
Cabana	29		X	X
Cayman	23		X	X
Ciara	28		X	X
Countess	44	X		X
Oasis	24-25		X	X
Patio Pro	31		X	X
Pro Series - 52"	46-47	X		X
Tropic Air	59		X	X
Vera Cruz	26-27		X	X

* Manual reversing from fan switch

** On/off light only - no dimming

Ceiling Fan Features & Specifications

Page	22	17	16	20	29	23	28	44
Fan	Andros (AD)	Artiste 60" (AT)	Artiste 72" (AT2)	Bimini (BIM)	Cabana (RC)	Cayman (CM)	Ciara (CI)	Countess (CT)
Built In Uplight								
Specially Designed Blades Included	X	X	X	X	X	X	X	X
Recommend 27", 36" and 42" Blades								X
Recommend 44", 52" and Designer Blades						X		
Recommend 52", 56" and Designer Blades								
Recommend GN60/72 Blades								
Recommend 56" and TB60 Blades								
Light Kit Included	X	X	X					
Light Kit Adaptable				X	X	X	X	X
Full Function Wall Control Included								
Full Function Remote Control Included		X	X					
Non-Reversing Wall Control Included*								
Non-Reversing Remote Control Included*	X			X				
Full Function Remote Control Adaptable								
Non-Reversing Remote Control Adaptable*					X	X	X	X
Downrod Length (inches)	4	6	6	4	4	4	4	4
Flush Mount Capability								X
Motor Size	172x20	DC-188	DC-188	188x22	153x10	188x15	172x14	153x10
Blade Pitch	14	14	14	14	14	14	13	14
Maximum Mounting Angle **	28	20	20	23	35	30	20	22
Measurement "A" (inches)	11.63	11.30	11.83	15.75	11	14.5	11.63	10.8
Measurement "B" (inches)	21	14.84	15.52	17.5	13	17	21	12.8
Box Weight (lb)	32	19.0	24.5	27.6	12.8	36.4	20	15
UL Listed Damp (D) or Wet (W) Location	W	D	W	W	W	W	W	

* Receiver (Item: URC) mounts inside ceiling canopy. Reversing function remains manual with fan's reversing switch and remote control transmitting range is limited to 20-25 feet typically. Ceiling slope angle is also restricted to 14 degrees (3/12 ceiling pitch) when canopy mounted remote is used.

** See Page 85

(Features and specifications subject to change without notice.)

Ceiling Fan Features & Specifications

Page	33	40-41	62-63	56-57	36-37	52-53	55	13
Fan	Deuce (DU)	Envoy (EN2)	Excel (MX2)	Gladiator (GL3)	Grand Marquis (GMRP)	Grander (GN)	Hover (HV)	Indy 56" (IN)
Built In Uplight		X						
Specially Designed Blades Included	X	X			X			X
Recommend 27", 36" and 42" Blades								
Recommend 44", 52" and Designer Blades		X			X			
Recommend 52", 56" and Designer Blades			X					
Recommend GN60/72 Blades						X		
Recommend 56" and TB60 Blades				X				
Light Kit Included	X				X		X	
Light Kit Adaptable		X	X	X		X		
Full Function Wall Control Included								
Full Function Remote Control Included				X		X	X	
Non-Reversing Wall Control Included*								X
Non-Reversing Remote Control Included*	X							
Full Function Remote Control Adaptable		X	X		X			
Non-Reversing Remote Control Adaptable*								
Downrod Length (inches)	4	6	3/6	6	4	6	6	6
Flush Mount Capability			X		X			
Motor Size	153x22	188x15	188x22	DC-125	188x15	DC-165	DC-125	172x17
Blade Pitch	15	14	16	16	14	13.5	14	35
Maximum Mounting Angle **	29	33	22	22	22	22	23	20
Measurement "A" (inches)	12.3	13.5	14.75	15.5	14.75	13.3	13.2	11.53
Measurement "B" (inches)	15.6	14.5	15.5	16	15.75	17	18	12.60
Box Weight (lb)	21.6	24.9	19.8	22.4	22.3	22	13.8	17.2
UL Listed Damp (D) or Wet (W) Location								

* Receiver (Item: URC) mounts inside ceiling canopy. Reversing function remains manual with fan's reversing switch and remote control transmitting range is limited to 20-25 feet typically. Ceiling slope angle is also restricted to 14 degrees (3/12 ceiling pitch) when canopy mounted remote is used.

** See Page 85

(Features and specifications subject to change without notice.)

Ceiling Fan Features & Specifications

Page	11	38-39	61	42-43	18	35	24-25
Fan	Indy 72" (IN2)	Lafayette (LF)	LX (LX2)	Marquis (MR2)	Module (MU)	Nola (NL)	Oasis (OA2)
Built In Uplight			X				
Specially Designed Blades Included	X	X		X	X	X	X
Recommend 27", 36" and 42" Blades							
Recommend 44", 52" and Designer Blades		X		X			X
Recommend 52", 56" and Designer Blades			X				
Recommend GN60/72 Blades							
Recommend 56" and TB60 Blades							
Light Kit Included					X	X	
Light Kit Adaptable		X	X	X			X
Full Function Wall Control Included							
Full Function Remote Control Included					X	X	
Non-Reversing Wall Control Included*	X						
Non-Reversing Remote Control Included*							
Full Function Remote Control Adaptable		X	X	X			
Non-Reversing Remote Control Adaptable*							X
Downrod Length (inches)	6	6	6	4	6	N/A	4
Flush Mount Capability		X		X			
Motor Size	188x25	188x15	188x20	188x15	DC-125	172x15	188x15
Blade Pitch	55	14	14	14	13.5	14	14
Maximum Mounting Angle **	18	22	33	22	17.5	N/A	26
Measurement "A" (inches)	12.67	15	14.75	14.75	11.81	8.75	12.75
Measurement "B" (inches)	13.39	15.25	15.75	15.75	14.94	12.875	14.5
Box Weight (lb)	11.2	29	19.8	21.6	18.10	22.5	22.3
UL Listed Damp (D) or Wet (W) Location					W		W

* Receiver (Item: URC) mounts inside ceiling canopy. Reversing function remains manual with fan's reversing switch and remote control transmitting range is limited to 20-25 feet typically. Ceiling slope angle is also restricted to 14 degrees (3/12 ceiling pitch) when canopy mounted remote is used.

** See Page 85

(Features and specifications subject to change without notice.)

Ceiling Fan Features & Specifications

Page	31	47	46-47	21	32
Fan	Patio Pro (VP2)	Pro Series 42" (PF42)	Pro Series 52" (PFES52)	Spire (SR)	Strasburg (ST)
Built In Uplight					X
Specially Designed Blades Included	X	X	X	X	X
Recommend 27", 36" and 42" Blades					
Recommend 44", 52" and Designer Blades	X				
Recommend 52", 56" and Designer Blades					
Recommend GN60/72 Blades					
Recommend 56" and TB60 Blades					
Light Kit Included				X	
Light Kit Adaptable	X	X	X		X
Full Function Wall Control Included					X
Full Function Remote Control Included					
Non-Reversing Wall Control Included*					
Non-Reversing Remote Control Included*				X	
Full Function Remote Control Adaptable					X
Non-Reversing Remote Control Adaptable*	X	X	X		
Downrod Length (inches)	4	4	4	6	6/12
Flush Mount Capability		X	X		
Motor Size	188x15	153x10	153x15	153x20	188x25
Blade Pitch	14	12	12	12	14
Maximum Mounting Angle **	35	28	28	20	25
Measurement "A" (inches)	11.38	11	11.5	13.04"	18.75
Measurement "B" (inches)	13.5	13	13.5	16.45"	24.5
Box Weight (lb)	15.4	12	15.2	22	38.6
UL Listed Damp (D) or Wet (W) Location	W			W	

* Receiver (Item: URC) mounts inside ceiling canopy. Reversing function remains manual with fan's reversing switch and remote control transmitting range is limited to 20-25 feet typically. Ceiling slope angle is also restricted to 14 degrees (3/12 ceiling pitch) when canopy mounted remote is used.

** See Page 85

(Features and specifications subject to change without notice.)

Ceiling Fan Features & Specifications


Page	15	59	8-9	6-7	26-27	19
Fan	Tier (TI)	Tropic Air (TA2)	Vail (VA)	Vantage (VT)	Vera Cruz (VC2)	Verge (VR)
Built In Uplight						
Specially Designed Blades Included	X		X	X	X	X
Recommend 27", 36" and 42" Blades						
Recommend 44", 52" and Designer Blades					X	
Recommend 52", 56" and Designer Blades		X				
Recommend GN60/72 Blades						
Recommend 56" and TB60 Blades						
Light Kit Included	X		X	X		X
Light Kit Adaptable		X			X	
Full Function Wall Control Included						
Full Function Remote Control Included			X	X		
Non-Reversing Wall Control Included*						
Non-Reversing Remote Control Included*	X					X
Full Function Remote Control Adaptable						
Non-Reversing Remote Control Adaptable*		X			X	
Downrod Length (inches)	6	6	6	6	4	6
Flush Mount Capability					X	
Motor Size	188x20	188x25	DC-125	DC-165	188x15	153x17
Blade Pitch	14	20	14	12.5	14	20
Maximum Mounting Angle **	25	33	20	20	35	20
Measurement "A" (inches)	12.97	16	13.82	14	11.38	13.35
Measurement "B" (inches)	16.3	18	16.41	16.38	13.5	17.85
Box Weight (lb)	24.7	22	19.2	27	18.7	
UL Listed Damp (D) or Wet (W) Location	W	W	W	W	W	W

* Receiver (Item: URC) mounts inside ceiling canopy. Reversing function remains manual with fan's reversing switch and remote control transmitting range is limited to 20-25 feet typically. Ceiling slope angle is also restricted to 14 degrees (3/12 ceiling pitch) when canopy mounted remote is used.

** See Page 85

Measurements (Inches)


- All measurements made using standard supplied downrod
- Measurement "A" is to bottom of edge of blade
- Measurement "B" is to bottom of light kit, if included with fan, otherwise to bottom of switch housing
- For multi-mount fans using close-up mounting, subtract 3-3/4" for fans with 4" downrods, 5-3/4" for fans with 6" downrods.

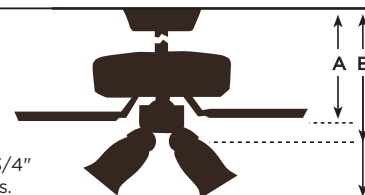


(Features and specifications subject to change without notice.)

Room Size, Ceiling Height and Slope

Quality & Features That Make a Difference

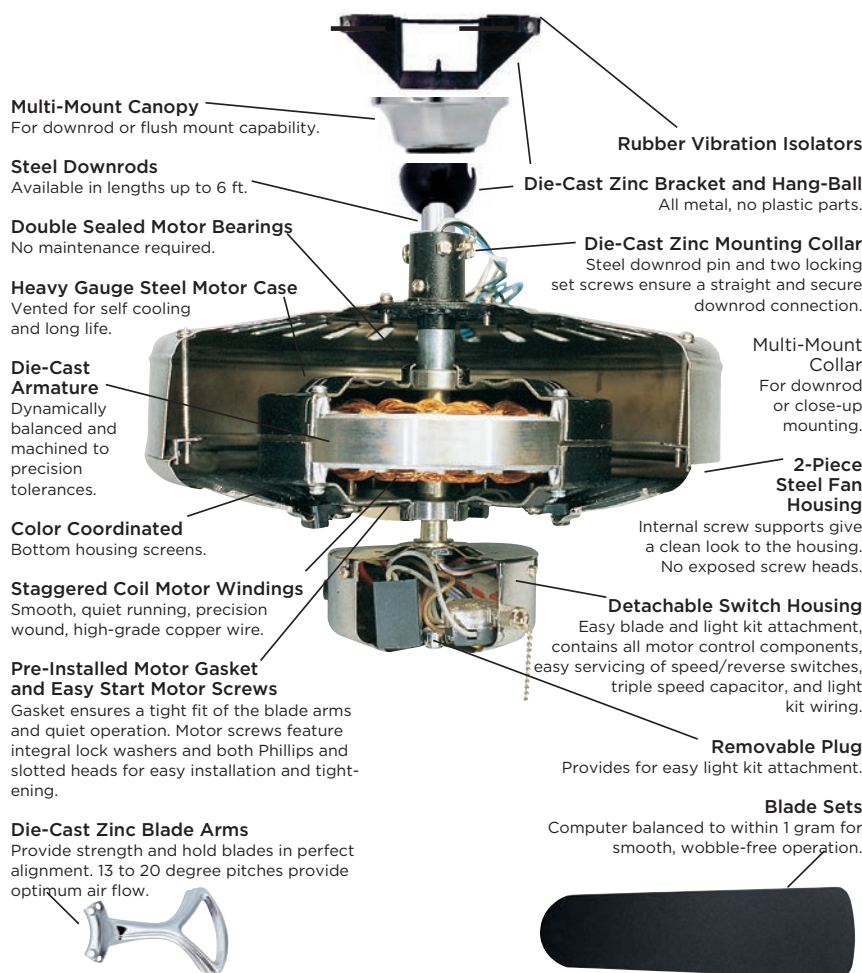

Year-Round Comfort

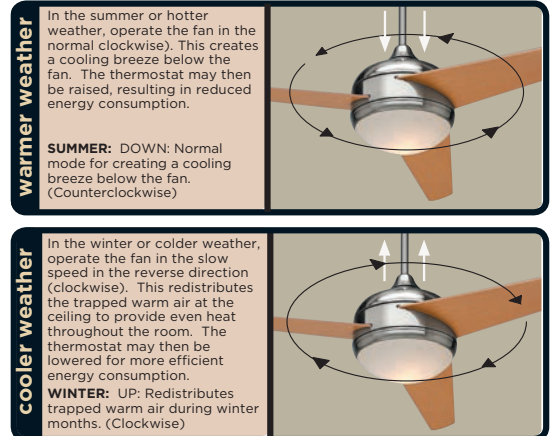

Supplied mounting brackets allow mounting on ceiling slopes from 22° (5/12 pitch), to 39° (10/12 pitch).

Degree = Ceiling Slope (Pitch)
4-8 degrees = 1/12 pitch
9-13 degrees = 2/12 pitch
14-17 degrees = 3/12 pitch
18-21 degrees = 4/12 pitch
22-25 degrees = 5/12 pitch
26-29 degrees = 6/12 pitch
30-32 degrees = 7/12 pitch
33-35 degrees = 8/12 pitch
36-38 degrees = 9/12 pitch
39-41 degrees = 10/12 pitch
42-44 degrees = 11/12 pitch
45 degrees = 12/12 pitch


Regency's optional slope kit shown on page 84 allows mounting on ceilings up to 45° (12/12 pitch). When using canopy installed remote controls, the maximum slope is restricted to 14° (3/12 pitch). Sloped ceiling kits are not adaptable to canopy installed remote control use.

A Regency Fan for Every Room Size

Blade Sweep	27", 36", 42"	44"	52"	56", 60"
Approximate Room Size	6' x 8' 40-60 sq. ft.	8' x 10' 70-90 sq. ft.	10' x 12' 100-150 sq. ft.	12' x 15' (great room) over 160 sq. ft.

These measurements are for general air flow requirements only. Decorating plans or aesthetic considerations should influence your fan choices beyond these room size specifications. For very large rooms, multiple fans are also recommended.

What About Ceiling Height?

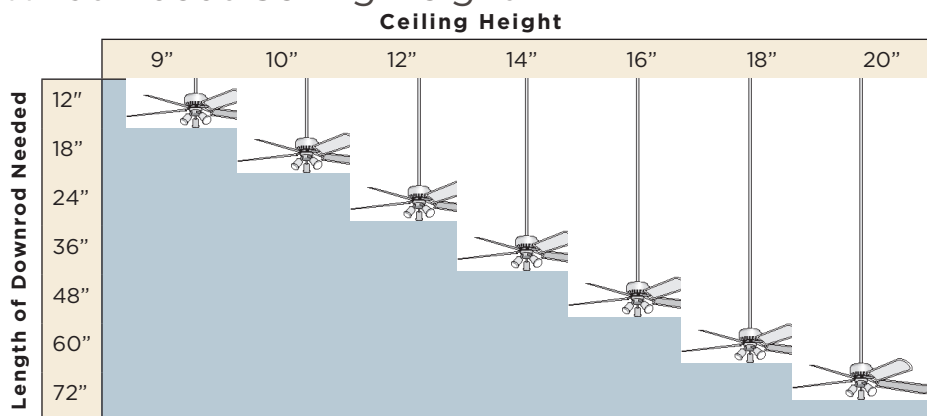

Be sure there is at least 7 feet of clearance under your ceiling fan blades. The standard 4"-6" downrod should work in most 8 ft. ceiling installations. This will position the blades far enough from the ceiling to have enough "supply" air above the blades to provide good air movement. If greater floor to fan clearance is needed, some fans can be mounted "close-up" without using any downrod. However, air movement is reduced using the close-up mounting. This chart shows recommended downrod lengths for various ceiling heights.


Light Kit Specifications

	Item	Description	Available Finishes	Width	Height	Bulbs	Max Watt	Lamp
LED Light Kits (Indoor Only)								
	LK12	LED White Glass	AC, CW	11"	4-7/8"	16 Watt LED		
	LK14L	LED White Glass	BN, ORB, SS	12"	3-1/2"	22 Watt LED		
	LK82	LED Very Low Profile White Glass	Comes with BN, Caps and finials available in all colors	12"	4-5/8"	4.5 Watt LED		
	LK270	LED Very Low Profile Bowl White Glass	CW, SS	13-1/2"	4"	20 Watt LED		
	LK272	LED Very Low Profile Bowl White Glass	AC	13-1/2"	4-3/4"	21 Watt LED		
LED Light Kits (Indoor/Outdoor)								
	LK12W	LED Wet Location White Glass	AW, BNW, DF, MB, ORB	11"	4-7/8"	16 Watt LED		
	LK272W	LED Wet Location Very Low Profile Bowl White Glass	AW, BNW, ORB	13-1/2"	4-3/4"	21 Watt LED		
Damp Location Light Kits								
	LK427D	Damp Location 4-Light Spot	AW, ORB	9-1/2"	6"	4	40	E12
Wet Location Light Kits								
	LK90W	Wet Location Low Profile Bowl White Glass	AW, BNW, DF, MB, ORB	11"	5-3/8"	2	60	E12
	LK95W	Wet Location Low Profile Bowl White Glass	AW, ORB	10-1/8"	6"	2	13	E26
Energy Saving Wet Location Light Kits								
	LK109ESW	Wet Location White Glass	AW	10-1/8"	5-7/8"	1	22	2 pin

Light Kit Specifications

	Item	Description	Available Finishes	Width	Height	Qty. Bulbs	Max. Watt	Lamp
	LK9	Low Profile Frosted Glass	AB, AW, BB, BN, CW, ORB, SS	10"	3-1/2"	2	60	E12
	LK9A	Low Profile Amber Glass	ORB	10"	3-1/2"	2	60	E12
	LK14	Low Profile Halogen	BN, SS	12"	3-1/2"	1	100	JDE 11
	LK14A	Low Profile Halogen Amber Glass	AC, ORB	12"	3-1/2"	1	100	JDE 11
	LK32A	Flat Metal Scroll Cradle Amber Glass	ORB	14"	6-1/4"	3	60	E12
	LK41P	White on White Swirl Glass	Comes with AW, Caps and finials available in all colors	11"	5"	3	60	E12
	LK41P-A	Amber Glass	Comes with ORB, Caps and finials available in all colors	11"	5"	3	60	E12
	LK54	Alabaster Curved White Glass	Comes with AW, Caps and finials available in all colors	12"	7-1/2"	3	60	E12
	LK54A	Amber Curved Glass	Comes with ORB, Caps and finials available in all colors	12"	7-1/2"	3	60	E12
	LK60	Low Profile Alabaster Bowl with Handcrafted Scrollwork	AW, BN, CW, ORB, SS	12-1/2"	5-1/2"	3	60	E12
	LK60A	Low Profile Amber Bowl with Handcrafted Scrollwork	AC, ORB	12-1/2"	5-1/2"	3	60	E12
	LK65	Very Low Profile Alabaster Bowl with Handcrafted Scrollwork	AW, BB, BN, CW, DI, SS	12-1/2"	5"	3	60	E12
	LK65A	Very Low Profile Amber Bowl with Handcrafted Scrollwork	AC, ORB	12-1/2"	5"	3	60	E12
	LK80	Very Low Profile Alabaster Bowl	All, comes with BN	12"	4-5/8"	3	60	E12
	LK80A	Very Low Profile Amber Bowl	All, comes with ORB	12"	4-5/8"	3	60	E12
	LK301T	3-Light Frosted Ribbed	AW, ORB	12"	6-1/2"	3	60	E12

Fitter Specifications

	Item	Description	Available Finishes	Width	Height	Bulbs	Max Watt	Lamp
	F401N	4-Light Bent Arm	AB, AW, BB, BN, CW, ORB, SS	12-1/2"	3-1/2"	4	40	E12

DESIGNER SERIES FANS

Andros

AD-ORB 22

Artiste 60"

AT-BN 17

AT-ORB 17

Artiste 72"

AT2-BNW 16

AT2-MW 16

AT2-ORB 16

Bimini

BIM-AW 20

BI-BNW 20

BIM-ORB 20

Cabana

RC-AW 29

RC-ORB 29

Cayman

CM-ORB 23

Ciara

CI-MB 28

CI-ORB 28

Countess

CT-AW 44

CT-ORB 44

Deuce

DU-BN 33

Envoy

EN2-BN 40

EN2-CW 41

EN2-ORB 40

Grand Marquis

GMRP-BN 36

GMRP-CW 37

GMRP-ORB 37

Indy 56"

IN-BN 12

IN-EB 13

IN-MB 13

IN-MW 13

Indy 72"

IN2-BN 11

IN2-EB 11

IN2-MW 11

Industrial

IND-MB 49

IND-ORB 49

IND-WH 48

Lafayette

LF-AC 38

LF-BN 39

LF-CW 39

LF-ORB 39

Marquis

MR2-AC 43

MR2-AW 43

MR2-BB 43

MR2-BN 42

MR2-CW 43

MR2-DF 42

MR2-MB 43

MR2-ORB 43

MR2-SS 43

Module

MU-BNW 18

Nola

NL-BN 35

NL-ORB 35

Oasis

OA2-AW 24

OA2-DF 24

OA2-MB 25

OA2-ORB 25

Patio Pro

VP2-AW 31

Professional

PFES52-AB 47

PFES52-AW 47

PFES52-CW 47

PFES52-ORB 46

PFES52-SS 46

Spire

SR-MW 21

SR-ORB 21

Strasburg

ST-ORB 32

Tier

TI-BNW 15

TI-ORB 15

Vail

VA-BNW 8

VA-DF 9

VA-LN 9

VA-MB 9

VA-MW 8

VA-ORB 8

Vantage

VT-BNW 7

VT-DF 6

VT-LN 6

VT-MB 7

VT-MW 6

VT-ORB 7

Vera Cruz

VC2-MB 27

VC2-ORB 26

Verge

VR-BNW 19

MOTOR ASSEMBLY FANS

Excel

MX2-AC 62

MX2-AW 63

MX2-BB 63

MX2-BN 62

MX2-CW 63

MX2-MB 63

MX2-ORB 62

MX2-SS 63

Gladiator

GL3-AC 56

GL3-BN 57

GL3-CW 57

GL3-ORB 57

GL3-SS 56

Grander

GN-BN 53

GN-CW 53

GN-ORB 52

Hover

HV-BN 55

LX2

LX2-BN 61

LX2-ORB 61

Tropic Air

TA2-ORB 59

BLADES

52" Designer
Blades 64

54" Carved
Wood Blades 65

Additional
Blades 68

Gladiator
Blades 58

Grander
Blades 54

Outdoor
Blades 66

LIGHT KITS

Damp
Location 74

Energy Saving 74

Fitters 75

Glass Shades 75

LED Kits 70

Light Kits 74

Wet Location 80

FAN ACCESSORIES

Bulbs 76

Ceiling
Accessories 76

Downrods 69

Pull Chains 76

Remote
Controls 79

Switches 76

Wall Controls 78

SPECIFICATIONS

Ceiling Fan 80-84

Room Size,
Ceiling Height,
Slope 85

Light Kit 86-87

Fitter 87

We want you to enjoy your experience with Regency Ceiling Fans & Hinkley.

There is nothing complicated about it: we want to deliver a great product and treat you the way we'd like to be treated.

So whether you are flipping through our catalog, surfing our site, getting inspired through social media, chatting with a member of our team or checking out our lighting & fans in a retail shop—we want it to be time well-spent. Here's all you need to know:

PRODUCT CATALOGS

Hinkley catalogs feature our current and complete offering along with important product specs and detailed photography. A must for the print-loving researcher who likes to tab their favorites. Stop by your local showroom for your own copy.

HINKLEYLIGHTING.COM

Immerse yourself in the world of Hinkley. Our easy-to-use site makes your research process a snap, with featured collections, style inspiration, in-depth product features, our Hinkley Ink blog and a quick connection to our elite network of retailers.

SOCIAL CLIMBERS

We don't mean to brag, but we are connected. Look for @hinkleylighting on:



REAL PEOPLE

Want to chat? Contact us at service@hinkleylighting.com or 1.800.HINKLEY.

Hinkley Lighting stands behind the quality of our lighting fixtures with product warranties that are among the strongest in the industry. For details of warranty coverage on specific products, please refer to hinkleylighting.com or consult a qualified Hinkley retail distributor.

Several Hinkley Lighting products are protected under U.S. Patent and foreign patent, or patent pending. For current information regarding Hinkley Lighting's patent portfolio, please visit hinkleylighting.com.

©2019 Hinkley Lighting, Inc. All rights reserved in all copyrightable works.



Hinkley Lighting is a proud partner of the American Lighting Association.

REGENCY®

CEILING FANS

A DIVISION OF HINKLEY LIGHTING

GLOBAL HEADQUARTERS

33000 Pin Oak Parkway | Avon Lake, Ohio 44012

T 440 653 5500 | F 440 653 5555

hinkleylighting.com | regencyfan.com

SHOWROOM

Dallas Trade Mart 3210 | Dallas, Texas 75207



Connect with us | [#hinkleystyle](https://twitter.com/hinkleystyle)

2019 REGENCY
CATALOG

RCF19

